


## PIM IGBT Module

### 电气特性:

- 1200V 沟槽栅/场终止工艺
- 低开关损耗
- 正温度系数

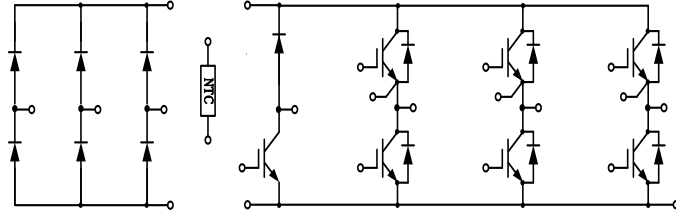

### 典型应用:

- 变频器
- 伺服
- 逆变器



$V_{CES} = 1200V$ ,  $I_{C\ nom} = 75A$  /  $I_{CRM} = 150A$

## IGBT, 逆变器 / IGBT, Inverter

### 最大额定值 / Maximum Ratings

Parameter	Conditions	Symbol	Value	Unit
集电极-发射极电压 Collector-Emitter voltage	$T_{vj} = 25^{\circ}C$	$V_{CES}$	1200	V
连续集电极直流电流 Continuous DC collector current	$T_C = 100^{\circ}C$ , $T_{vj\ max} = 175^{\circ}C$	$I_{C\ nom}$	75	A
集电极重复峰值电流 Repetitive peak collector current	$t_p = 1\ ms$	$I_{CRM}$	150	A
总功率损耗 Total power dissipation	$T_C = 25^{\circ}C$ , $T_{vj\ max} = 175^{\circ}C$	$P_{tot}$	380	W
栅极-发射极电压 Gate emitter voltage		$V_{GE}$	$\pm 20$	V

### 特征值 / Characteristic Values

Parameter	Conditions	Symbol	Value			Unit
			Min.	Typ.	Max.	
集电极-发射极饱和电压 Collector-Emitter saturation voltage	$V_{GE} = 15V$ , $I_C = 75A$ $T_{vj} = 25^{\circ}C$ $V_{GE} = 15V$ , $I_C = 75A$ $T_{vj} = 125^{\circ}C$ $V_{GE} = 15V$ , $I_C = 75A$ $T_{vj} = 150^{\circ}C$	$V_{CEsat}$		1.72 2.04 2.12	2.10	V
栅极-发射极阈值电压 Gate-Emitter threshold voltage	$I_C = 2.4mA$ , $V_{GE} = V_{CE}$ $T_{vj} = 25^{\circ}C$	$V_{GE(th)}$	5.10	5.60	6.20	

栅电荷 Gate charge	$V_{GE}=-15V...+15V$	$Q_G$		0.58		$\mu C$
内部栅极电阻 Internal gate resistor		$R_{Gint}$		6.24		$\Omega$
输入电容 Input capacitance	$f=1MHz, V_{CE}=25V, V_{GE}=0V \quad T_{vj}=25^\circ C$	$C_{ies}$		5.24		nF
反向传输电容 Reverse transfer capacitance		$C_{res}$		0.24		
集电极-发射极截止电流 Collector-emitter cut-off current	$V_{CE}=1200V, V_{GE}=0V \quad T_{vj}=25^\circ C$	$I_{CES}$			1.0	mA
栅极-发射极漏电流 Gate-emitter leakage current	$V_{CE}=0V, V_{GE}=20V \quad T_{vj}=25^\circ C$	$I_{GES}$			100	nA
开通延迟时间 Turn-on delay time	$I_C=75A, V_{CE}=600V \quad T_{vj}=25^\circ C$ $V_{GE}=\pm 15V, R_G=1\Omega \quad T_{vj}=125^\circ C$ (电感负载) / (inductive load) $T_{vj}=150^\circ C$	$t_{don}$		85		
				95		
				96		
上升时间 Rise time	$I_C=75A, V_{CE}=600V \quad T_{vj}=25^\circ C$ $V_{GE}=\pm 15V, R_G=1\Omega \quad T_{vj}=125^\circ C$ (电感负载) / (inductive load) $T_{vj}=150^\circ C$	$t_r$		31		ns
				34		
				37		
关断延迟时间 Turn-off delay time	$I_C=75A, V_{CE}=600V \quad T_{vj}=25^\circ C$ $V_{GE}=\pm 15V, R_G=1\Omega \quad T_{vj}=125^\circ C$ (电感负载) / (inductive load) $T_{vj}=150^\circ C$	$t_{doff}$		256		
				309		
				323		
下降时间 Fall time	$I_C=75A, V_{CE}=600V \quad T_{vj}=25^\circ C$ $V_{GE}=\pm 15V, R_G=1\Omega \quad T_{vj}=125^\circ C$ (电感负载) / (inductive load) $T_{vj}=150^\circ C$	$t_f$		186		
				178		
				167		
开通损耗能量 (每脉冲) Turn-on energy loss per pulse	$I_C=75A, V_{CE}=600V \quad T_{vj}=25^\circ C$ $V_{GE}=\pm 15V, R_G=1\Omega \quad T_{vj}=125^\circ C$ (电感负载) / (inductive load) $T_{vj}=150^\circ C$	$E_{on}$		4.34		mJ
				7.86		
				8.90		
关断损耗能量 (每脉冲) Turn-off energy loss per pulse	$I_C=75A, V_{CE}=600V \quad T_{vj}=25^\circ C$ $V_{GE}=\pm 15V, R_G=1\Omega \quad T_{vj}=125^\circ C$ (电感负载) / (inductive load) $T_{vj}=150^\circ C$	$E_{off}$		5.58		
				6.87		
				7.06		
短路数据 SC data	$V_{GE} \leq 15V, V_{CC}=800V$ $V_{CEmax}=V_{CES}-L_{sCE} \cdot di/dt \quad t_p \leq 10\mu s, T_{vj}=150^\circ C$	$I_{SC}$		398		A
结-外壳热阻 Thermal resistance, junction to case	每个 IGBT / per IGBT	$R_{thJC}$			0.39	K/W
在开关状态下温度 Temperature under switching conditions		$T_{vj op}$	-40		150	$^\circ C$

## 二极管, 逆变器 / Diode, Inverter

### 最大额定值 / Maximum Ratings

Parameter	Conditions	Symbol	Value	Unit
反向重复峰值电压 Repetitive peak reverse voltage	$T_{vj}=25^\circ C$	$V_{RRM}$	1200	V
连续正向直流电流 Continuous DC forward current		$I_F$	60	A
正向重复峰值电流 Repetitive peak forward current	$t_p=1ms$	$I_{FRM}$	120	A

I <sup>2</sup> t 值 I <sup>2</sup> t-value	t <sub>p</sub> =10ms, sin180°, T <sub>j</sub> =125°C	I <sup>2</sup> t	960	A <sup>2</sup> s
--	--	------------------	-----	------------------

## 特征值 / Characteristic Values

Parameter	Conditions	Symbol	Value			Unit
			Min.	Typ.	Max.	
正向电压 Forward voltage	I <sub>F</sub> =60A, V <sub>GE</sub> =0V I <sub>F</sub> =60A, V <sub>GE</sub> =0V I <sub>F</sub> =60A, V <sub>GE</sub> =0V	T <sub>vj</sub> =25°C T <sub>vj</sub> =125°C T <sub>vj</sub> =150°C	V <sub>F</sub>	1.98 1.70 1.63	2.50	V
反向恢复峰值电流 Peak reverse recovery current	I <sub>F</sub> =60A, -di <sub>F</sub> /dt=1886A/μs(T <sub>vj</sub> =150°C) V <sub>R</sub> =600V, V <sub>GE</sub> =-15V	T <sub>vj</sub> =25°C T <sub>vj</sub> =125°C T <sub>vj</sub> =150°C	I <sub>RM</sub>	64 98 107		A
恢复电荷 Recovered charge	I <sub>F</sub> =60A, -di <sub>F</sub> /dt=1886A/μs(T <sub>vj</sub> =150°C) V <sub>R</sub> =600V, V <sub>GE</sub> =-15V	T <sub>vj</sub> =25°C T <sub>vj</sub> =125°C T <sub>vj</sub> =150°C	Q <sub>r</sub>	4.74 10.83 12.65		μC
反向恢复损耗（每脉冲） Reverse recovered energy	I <sub>F</sub> =60A, -di <sub>F</sub> /dt=1886A/μs(T <sub>vj</sub> =150°C) V <sub>R</sub> =600V, V <sub>GE</sub> =-15V	T <sub>vj</sub> =25°C T <sub>vj</sub> =125°C T <sub>vj</sub> =150°C	E <sub>rec</sub>	1.75 3.87 4.46		mJ
结-外壳热阻 Thermal resistance, junction to case	每个二极管 / per diode	R <sub>thJC</sub>			0.62	K/W
在开关状态下温度 Temperature under switching conditions		T <sub>vj op</sub>	-40		150	°C

## 二极管，整流器 / Diode, Rectifier

### 最大额定值 / Maximum Ratings

Parameter	Conditions	Symbol	Value	Unit
反向重复峰值电压 Repetitive peak reverse voltage	T <sub>vj</sub> =25°C	V <sub>RRM</sub>	1800	V
反向不重复峰值电压 Non-Repetitive peak reverse voltage	T <sub>vj</sub> =25°C, I <sub>RRM</sub> =10μA	V <sub>RSM</sub>	2000	V
最大正向平均电流 Maximum Average Forward Current		I <sub>F(AV)</sub>	70	A
正向浪涌电流 Surge forward current	t <sub>p</sub> =10ms, sin180°, T <sub>vj</sub> =25°C	I <sub>FSM</sub>	840	A
I <sup>2</sup> t 值 I <sup>2</sup> t-value	t <sub>p</sub> =10ms, sin180°, T <sub>vj</sub> =25°C	I <sup>2</sup> t	3528	A <sup>2</sup> s

### 特征值 / Characteristic Values

Parameter	Conditions	Symbol	Value			Unit
			Min.	Typ.	Max.	
正向电压 Forward voltage	I <sub>F</sub> =70A, T <sub>vj</sub> =25°C	V <sub>F</sub>			1.2	V
反向电流 Reverse current	V <sub>R</sub> =V <sub>RRM</sub> T <sub>vj</sub> =25°C	I <sub>R</sub>			10	μA

在开关状态下温度 Temperature under switching conditions		$T_{vj\ op}$	-40		150	°C
--	--	--------------	-----	--	-----	----

## IGBT，制动-斩波器 / IGBT, Brake-Chopper

### 最大额定值 / Maximum Ratings

Parameter	Conditions	Symbol	Value	Unit
集电极-发射极电压 Collector-Emitter voltage	$T_{vj}=25^{\circ}\text{C}$	$V_{CES}$	1200	V
连续集电极直流电流 Continuous DC collector current	$T_C=100^{\circ}\text{C}, T_{vj\ max}=175^{\circ}\text{C}$	$I_{C\ nom}$	50	A
集电极重复峰值电流 Repetitive peak collector current	$t_p=1\ ms$	$I_{CRM}$	100	A
总功率损耗 Total power dissipation	$T_C = 25^{\circ}\text{C}, T_{vj\ max} = 175^{\circ}\text{C}$	$P_{tot}$	270	W
栅极-发射极电压 Gate emitter voltage		$V_{GE}$	$\pm 20$	V

### 特征值 / Characteristic Values

Parameter	Conditions	Symbol	Value			Unit
			Min.	Typ.	Max.	
集电极-发射极饱和电压 Collector-Emitter saturation voltage	$V_{GE}=15\text{V}, I_C=50\text{A}$ $V_{GE}=15\text{V}, I_C=50\text{A}$ $V_{GE}=15\text{V}, I_C=50\text{A}$	$T_{vj}=25^{\circ}\text{C}$ $T_{vj}=125^{\circ}\text{C}$ $T_{vj}=150^{\circ}\text{C}$	$V_{CESat}$	2.02 2.52 2.68	2.40	V
栅极-发射极阈值电压 Gate-Emitter threshold voltage	$I_C=1.7\text{mA}, V_{GE}=V_{CE}$	$T_{vj}=25^{\circ}\text{C}$	$V_{GE(th)}$	5.10 5.70	6.30	
栅电荷 Gate charge	$V_{GE}=-15\text{V}\dots+15\text{V}$		$Q_G$	0.23		$\mu\text{C}$
内部栅极电阻 Internal gate resistor			$R_{Gint}$	2.61		$\Omega$
输入电容 Input capacitance	$f=1\text{MHz}, V_{CE}=25\text{V}, V_{GE}=0\text{V}$	$T_{vj}=25^{\circ}\text{C}$	$C_{ies}$	3.64		nF
反向传输电容 Reverse transfer capacitance			$C_{res}$	0.13		
集电极-发射极截止电流 Collector-emitter cut-off current	$V_{CE}=1200\text{V}, V_{GE}=0\text{V}$	$T_{vj}=25^{\circ}\text{C}$	$I_{CES}$		1	mA
栅极-发射极漏电流 Gate-emitter leakage current	$V_{CE}=0\text{V}, V_{GE}=20\text{V}$	$T_{vj}=25^{\circ}\text{C}$	$I_{GES}$		100	nA
开通延迟时间 Turn-on delay time	$I_C=50\text{A}, V_{CE}=600\text{V}$ $V_{GE}=\pm 15\text{V}, R_G=15\Omega$ (电感负载) / (inductive load)	$T_{vj}=25^{\circ}\text{C}$ $T_{vj}=125^{\circ}\text{C}$ $T_{vj}=150^{\circ}\text{C}$	$t_{d\ on}$	119 112 112		ns
上升时间 Rise time	$I_C=50\text{A}, V_{CE}=600\text{V}$ $V_{GE}=\pm 15\text{V}, R_G=15\Omega$ (电感负载) / (inductive load)	$T_{vj}=25^{\circ}\text{C}$ $T_{vj}=125^{\circ}\text{C}$ $T_{vj}=150^{\circ}\text{C}$	$t_r$	38 47 49		
关断延迟时间 Turn-off delay time	$I_C=50\text{A}, V_{CE}=600\text{V}$ $V_{GE}=\pm 15\text{V}, R_G=15\Omega$	$T_{vj}=25^{\circ}\text{C}$ $T_{vj}=125^{\circ}\text{C}$	$t_{d\ off}$	319 358		

	(电感负载) / (inductive load)	$T_{vj}=150^{\circ}\text{C}$			368		
下降时间 Fall time	$I_C=50\text{A}, V_{CE}=600\text{V}$	$T_{vj}=25^{\circ}\text{C}$	$t_f$		176		
	$V_{GE}=\pm 15\text{V}, R_G=15\Omega$	$T_{vj}=125^{\circ}\text{C}$			257		
	(电感负载) / (inductive load)	$T_{vj}=150^{\circ}\text{C}$			237		
开通损耗能量 (每脉冲) Turn-on energy loss per pulse	$I_C=50\text{A}, V_{CE}=600\text{V}$	$T_{vj}=25^{\circ}\text{C}$	$E_{on}$		4.00		mJ
	$V_{GE}=\pm 15\text{V}, R_G=15\Omega$	$T_{vj}=125^{\circ}\text{C}$			7.00		
	(电感负载) / (inductive load)	$T_{vj}=150^{\circ}\text{C}$			7.89		
关断损耗能量 (每脉冲) Turn-off energy loss per pulse	$I_C=50\text{A}, V_{CE}=600\text{V}$	$T_{vj}=25^{\circ}\text{C}$	$E_{off}$		3.13		
	$V_{GE}=\pm 15\text{V}, R_G=15\Omega$	$T_{vj}=125^{\circ}\text{C}$			4.26		
	(电感负载) / (inductive load)	$T_{vj}=150^{\circ}\text{C}$			4.68		
短路数据 SC data	$V_{GE}\leq 15\text{V}, V_{CC}=800\text{V}$ $V_{CEmax}=V_{CES}-L_{sCE}\cdot di/dt \quad t_p\leq 10\mu\text{s}, T_{vj}=150^{\circ}\text{C}$		$I_{SC}$		155		A
结-外壳热阻 Thermal resistance, junction to case	每个 IGBT / per IGBT		$R_{thJC}$			0.54	K/W
在开关状态下温度 Temperature under switching conditions			$T_{vj\ op}$	-40		150	$^{\circ}\text{C}$

## 二极管, 制动-斩波器 / Diode, Brake-Chopper

### 最大额定值 / Maximum Ratings

Parameter	Conditions	Symbol	Value	Unit
反向重复峰值电压 Repetitive peak reverse voltage	$T_{vj}=25^{\circ}\text{C}$	$V_{RRM}$	1200	V
连续正向直流电流 Continuous DC forward current		$I_F$	30	A
正向重复峰值电流 Repetitive peak forward current	$t_p=1\text{ms}$	$I_{FRM}$	60	A
$I^2t$ 值 $I^2t$ -value	$t_p=10\text{ms}, \sin 180^{\circ}, T_{vj}=125^{\circ}\text{C}$	$I^2t$	90	$\text{A}^2\text{s}$

### 特征值 / Characteristic Values

Parameter	Conditions	Symbol	Value			Unit
			Min.	Typ.	Max.	
正向电压 Forward voltage	$I_F=30\text{A}, V_{GE}=0\text{V}$ $I_F=30\text{A}, V_{GE}=0\text{V}$ $I_F=30\text{A}, V_{GE}=0\text{V}$	$V_F$		1.80	2.30	V
	$T_{vj}=25^{\circ}\text{C}$			1.52		
	$T_{vj}=125^{\circ}\text{C}$			1.46		
反向恢复峰值电流 Peak reverse recovery current	$I_F=30\text{A},$ $-di_F/dt=914\text{A}/\mu\text{s}(T_{vj}=150^{\circ}\text{C})$ $V_R=600\text{V}, V_{GE}=-15\text{V}$	$I_{RM}$		28		A
	$T_{vj}=25^{\circ}\text{C}$			35		
	$T_{vj}=125^{\circ}\text{C}$			36		
恢复电荷 Recovered charge	$I_F=30\text{A},$ $-di_F/dt=914\text{A}/\mu\text{s}(T_{vj}=150^{\circ}\text{C})$ $V_R=600\text{V}, V_{GE}=-15\text{V}$	$Q_r$		1.68		$\mu\text{C}$
	$T_{vj}=25^{\circ}\text{C}$			4.85		
	$T_{vj}=125^{\circ}\text{C}$			5.79		
反向恢复损耗 (每脉冲) Reverse recovered energy	$I_F=30\text{A},$ $-di_F/dt=914\text{A}/\mu\text{s}(T_{vj}=150^{\circ}\text{C})$ $V_R=600\text{V}, V_{GE}=-15\text{V}$	$E_{rec}$		0.47		mJ
	$T_{vj}=25^{\circ}\text{C}$			1.45		
	$T_{vj}=125^{\circ}\text{C}$			1.75		
结-外壳热阻 Thermal resistance, junction to case	每个二极管 / per diode	$R_{thJC}$			1.35	K/W

在开关状态下温度 Temperature under switching conditions		$T_{vj\ op}$	-40		150	°C
--	--	--------------	-----	--	-----	----

## 负温度系数热敏电阻 / NTC-Thermistor

### 特征值 / Characteristic Values

Parameter	Conditions	Symbol	Value			Unit
			Min.	Typ.	Max.	
额定电阻值 Rated resistances	$T_c=25^\circ\text{C}, \pm 5\%$	$R_{25}$		5.0		K $\Omega$
B-值 B-value	$\pm 2\%$	$B_{25/50}$		3375		K

## 模块 / Module

Parameter	Conditions	Symbol	Value			Unit
绝缘测试电压 Isolation test voltage	RMS, f=50Hz, t=1min	$V_{ISOL}$	2500			V
内部绝缘 Internal isolation			$\text{Al}_2\text{O}_3$			
储存温度 Storage temperature		$T_{stg}$	-40		125	°C
模块安装的扭矩 Mounting torque for modul mounting		M	3.0		6.0	Nm
重量 Weight		W		300		g

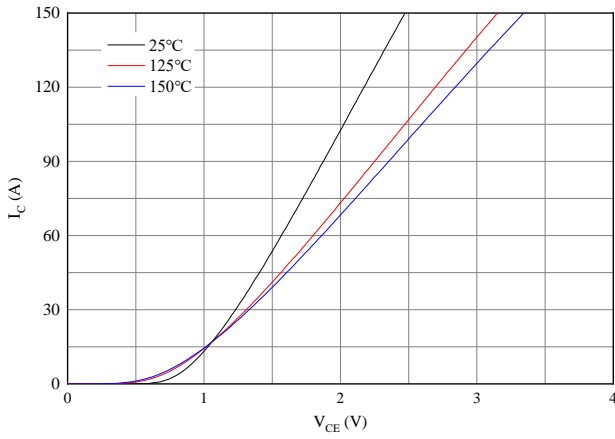


图 1. 典型输出特性 ( $V_{GE}=15V$ )

Figure 1. Typical output characteristics ( $V_{GE}=15V$ )

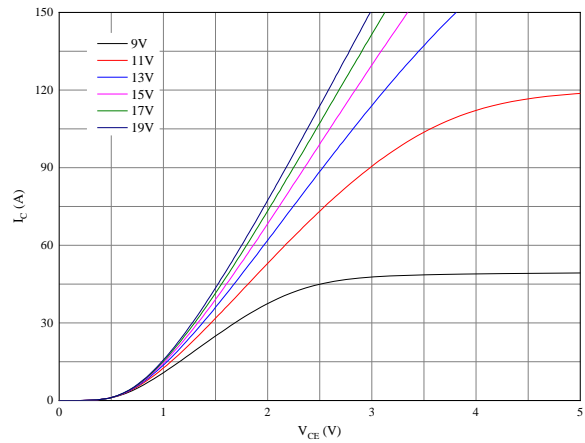


图 2. 典型输出特性 ( $T_{vj}=150^{\circ}C$ )

Figure 2. Typical output characteristics ( $T_{vj}=150^{\circ}C$ )

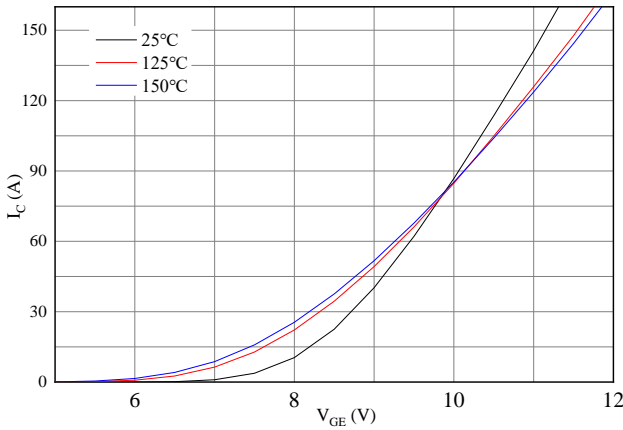


图 3. 典型传输特性 ( $V_{CE}=20V$ )

Figure 3. Typical transfer characteristic ( $V_{CE}=20V$ )

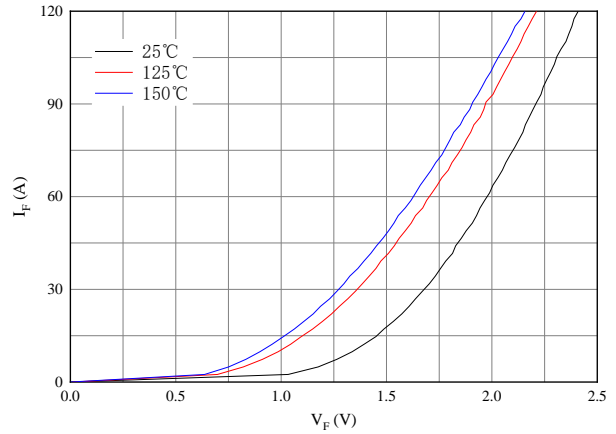


图 4. 正向偏压特性 二极管

Figure 4. Forward characteristic of Diode

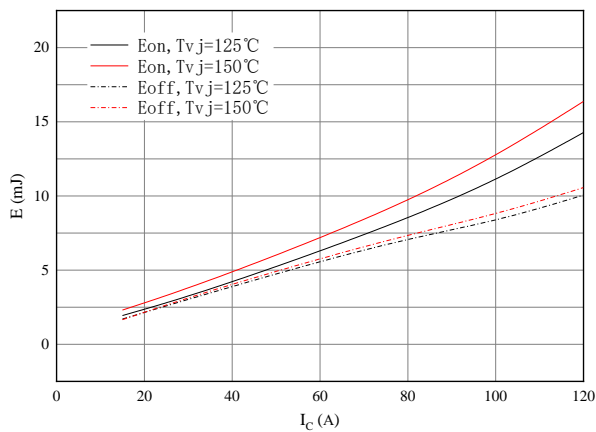


图 5. 开关损耗 逆变器

Figure 5. Switching losses of IGBT

$V_{GE}=\pm 15V, R_{Gon}=1\Omega, R_{Goff}=1\Omega, V_{CE}=600V$

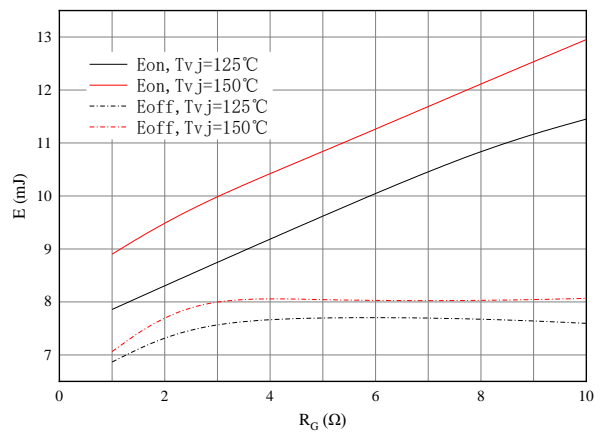


图 6. 开关损耗 逆变器

Figure 6. Switching losses of IGBT

$V_{GE}=\pm 15V, I_C=75A, V_{CE}=600V$

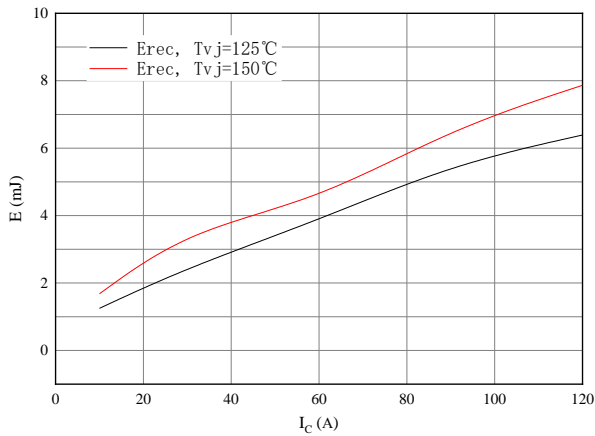


图 7. 开关损耗 二极管

Figure 7. Switching losses of Diode  
RGon=1Ω, VCE=600V

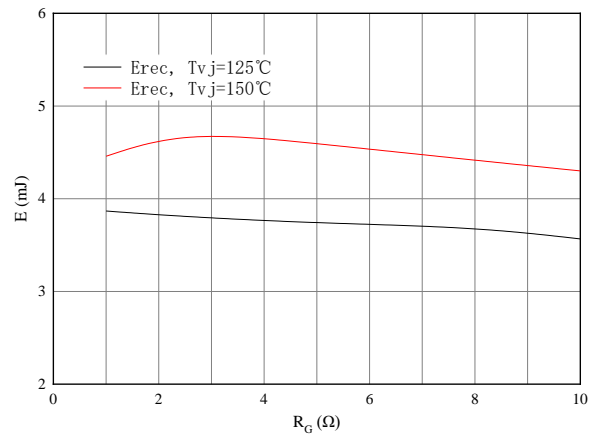


图 8. 开关损耗 二极管

Figure 8. Switching losses of Diode  
IF=60A, VCE=600V

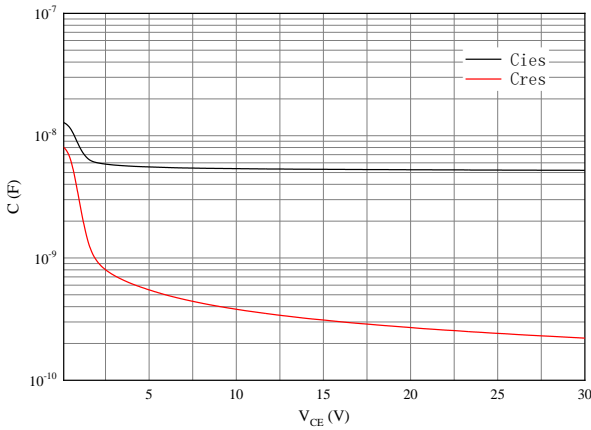


图 9. 电容特性

Figure 9. Capacitance characteristic


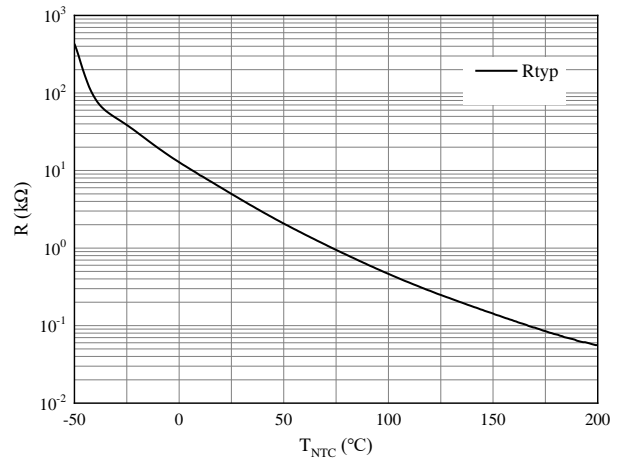


图 10. 负温系数热敏电阻 温度特性

Figure 10. NTC-Themistor-temperature characteristic



接线图 / Circuit diagram

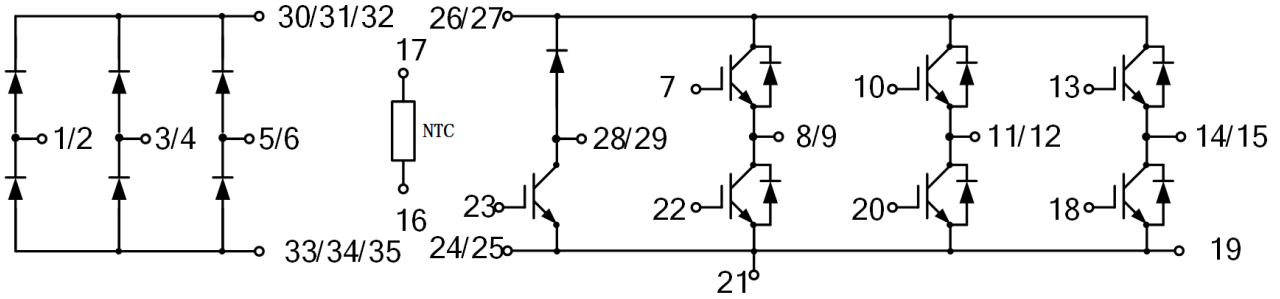

封装尺寸 / Package outlines

